
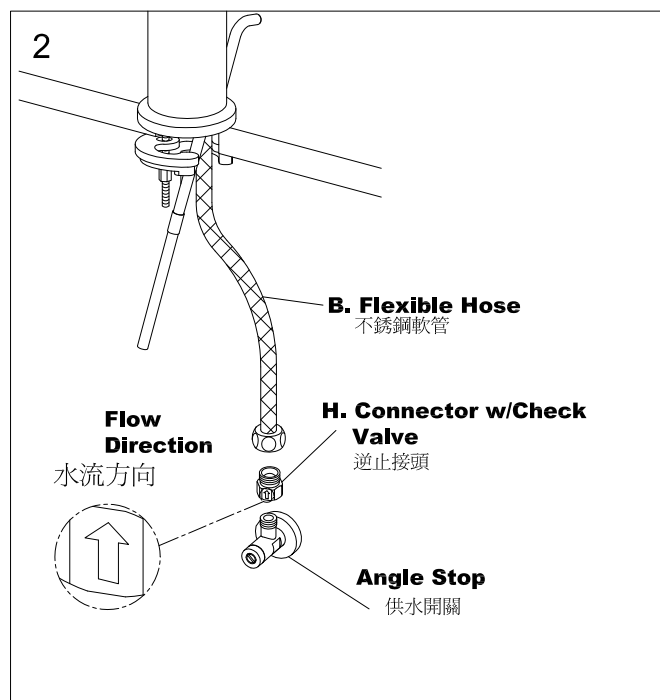


INSTALLATION INSTRUCTIONS

TIP-TOUCH LAVATORY FAUCET

按壓式檯面龍頭

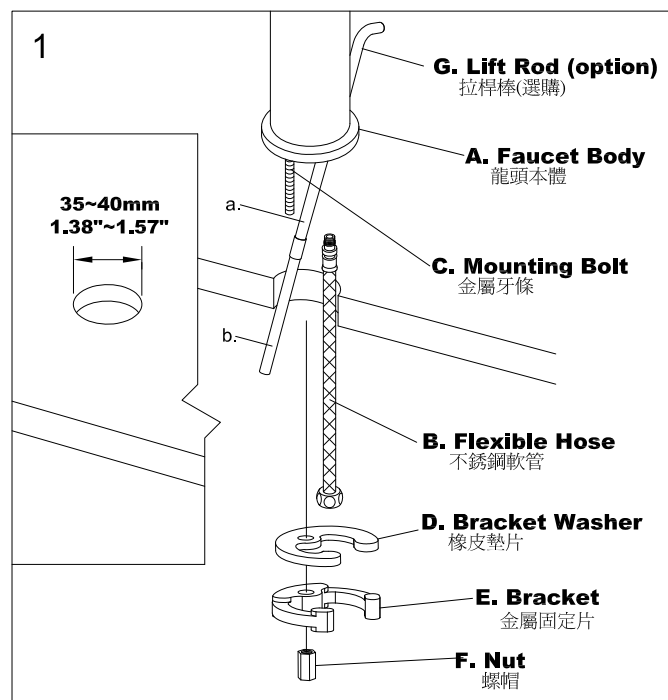

CAUTION : Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

Remove the aerator and fully turn on the faucet and run for 1 minute after finish installation, then turn off the water and reinstall the aerator.

完成安裝之後，把起泡器移開，把水全部轉開持續一分鐘，然後把水關掉再把起泡器裝回去。

1. Screw **Flexible Hose** and **Mounting Bolt** into **Faucet Body**. Insert **Flexible Hose** and **Mounting Bolt** through basin hole in fixture, meanwhile, assemble **Lift Rod** with **Faucet Body**. (Fig.1)

將不銹鋼軟管和金屬牙條鎖緊固定於龍頭本體，再將進水不銹鋼軟管和金屬牙條穿過洗臉盆(檯)洞口後，準備安裝，同時，把拉桿組裝在龍頭本體上。(圖.1)

2. Position **Faucet Body** on the deck for fixture, then place **Bracket Washer** with **Bracket** onto **Faucet Body** and tighten **Nut** securely. (Fig.1)

從龍頭本體下方依序套入橡皮墊片、金屬固定片和螺帽，確認龍頭方向位置後，鎖緊螺帽固定龍頭。(圖.1)

3. Install **Connector w/Check Valve** between **Flexible Hose** and **Angle stop**.(Fig.2)

先連接逆止接頭到進水開關，然後連接不銹鋼軟管至逆止接頭。(圖.2)

FIXING CONTENTS

組配件內容

